


Powerful. Beautiful.

Excellence · Innovation

IPC21215 (P)

IPC22215 (P)

IPC24215 (P)

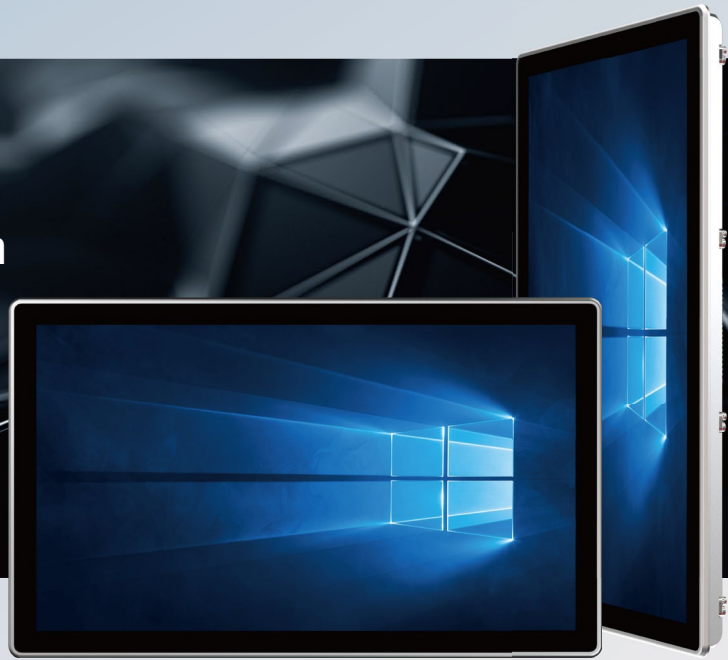

Shanghai Panelmate Electronics Co., Ltd.

21.5" FHD Industrial Panel PC (Vertical Screen)


IPC21215 (P) & IPC22215 (P) & IPC24215 (P)



Features

- Display type: 10.1",10.4",12.1",12.2",15",15.6",17",18.5",19",21.5",27"
- Front panel/back cover: Aluminium-magnesium alloy
- Large aluminium fins design to ensure the reliability and heat dissipation
- Front panel/Rear: IP65 / IP20
- Screen Type: Single point resistive touchscreen/Multi-point capacitive touchscreen/Non-touch screen
- OS:Win XP, Win7,Win10/Win11, Win CE, LINUX
- Equipped with 2xIntel i210AT Gigabit network cards, 4xUSB ports
- Processor: Intel Celeron J6412(don't support Win XP,Win 7)/3855U/3865U and Intel skylake i3/i5/i7 multiple CPU options
- Extendable WIFI/4G
- Customized LOGO


Namely Rule

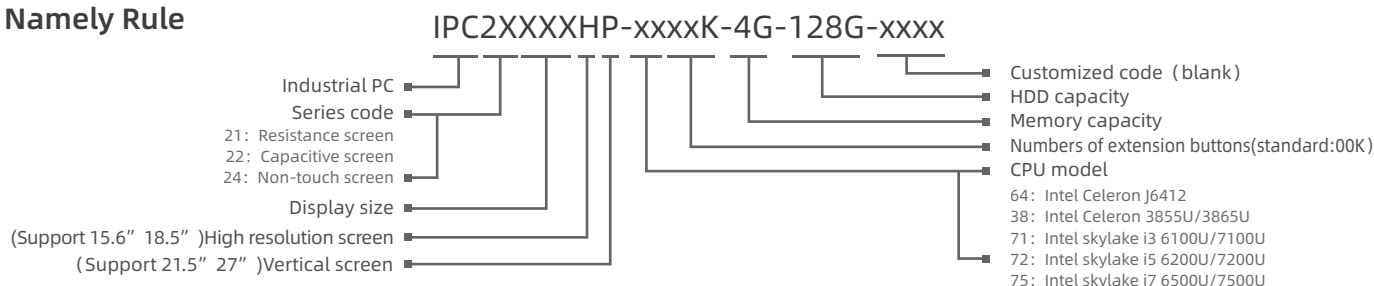

Specifications


Model	IPC21215 (P) & IPC22215 (P) & IPC24215 (P)			
Processor	CPU	Intel®Celeron® processor 3855U	Intel®Apollo Lake processor J3455	Intel®Core™i5 processor
	Frequency	Dual Core 1.6GHZ	Quad Core 1.5GHZ	Dual Core 2.3GHZ
	Cache	2MB	2MB L2 Cache	3MB Intel®Smart Cache
	Memory	DDR4-2133/2400MHZ,Max:16GB	1xSODIMM DDR3L 1333MHZ,Max:8GB	DDR4-2133/2400MHZ,Max:16GB
	Storage	1x2.5" SATA 3.0 +1 x mSATA		
I/O	Network (LAN)	2xIntel i210 1000Mbps RJ45 with surge protection		
	Audio	Realtek ALC662VD audio controller,support 5.1 channels		
	USB	4xUSB3.0/2.0		
	COM	2xRS232/RS485 with surge protection, RS485 support automatic flow control		
	Expansion Slot	1xMin-Pcie X1, Support 4G LTE/WIFI/BT with Sim card slot		
Power	Rear I/O	1xHDMI/2xGLAN/4xUSB/2xCOM/AUDIO/DC IN/Power Switch		
	Input Voltage	DC 9~36V		
Physical	Power	45W		
	Display Port	HDMI		
	Dimension (WxHxD/mm)	530.5 x 322.5 x 63.5 (20.89"x12.70"x2.5")		
	Open Size (WxH/mm)	519 x 311 (20.43"x12.24")		
	Net Weight(kg)	5.5		
LCD	Mounting	Embedded,Wall-mounted,VESA mounting		
	Display Type	21.5" FHD TFT		
	Resolution	1920x1080		
	Colors	16.7M		
	Active Area (WxH/mm)	476.64 x 268.11 (18.77"x10.56")		
	Backlight	LED		
	MTBF (hour)	30000hrs		
	Pixel Pitch (HxV)	0.24825x0.24825		
	Luminance(cd/m2)	250		
	Contrast Ratio	3000:1		
Touchscreen	Viewing Angle	(L) 89/ (R) 89/ (U) 89/ (D) 89		
	Touch Type	Single point resistive touchscreen & Multi-point capacitive touchscreen & Non-touch screen		
	Light Transmission	>85%		
	Controller	USB interface		
	Driver Support	Windows7, WSE7, Windows 10, Vxworks, Linux		
	Multi-touch	10 points (Windows)		
Environment	Surface Hardness	Resistive touchscreen: Mohs' Number>= 3H; Capacitive touchscreen: Mohs' Number 7H		
	Operating Temperature	0~50°C		
	Storage Temperature	-20~60°C		
	Relative Humidity	5~95% (Non condensation)		
	Shock	Operating 10G peak acceleration(11 ms duration), follow IEC 60068-2-27		
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms@with HDD; 2Grms@with SSD, follow IEC 60068-2-64		
	EMC	CE/FCC Class A		
Front Panel Protection	IP65			

Technical Drawings unit:mm

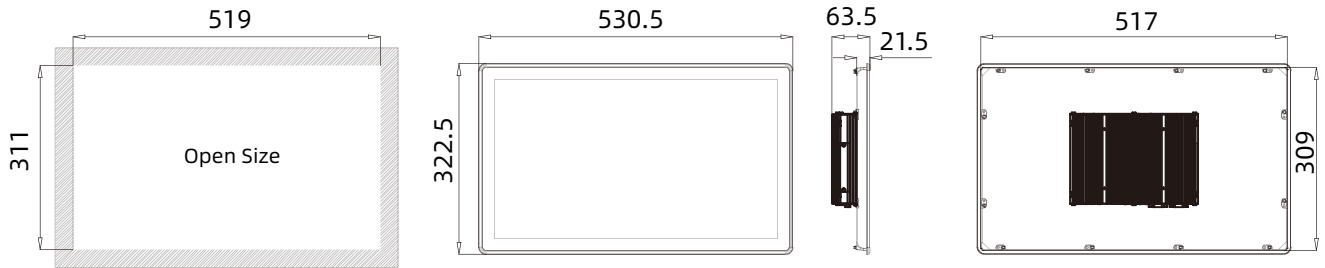

Panel Cutout Dimensions: 519x 311mm (20.43 x 12.24in)

External I/O View

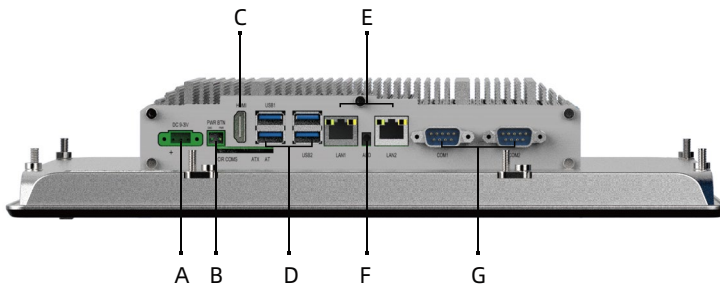

Interface definition:

- A: DC IN
- B: Power switch
- C: HDMI port
- D: 4xUSB 3.0/2.0
- E: 2xEthernet LAN
- F: Audio output
- G: 2xCOM

Ordering Information

Part Number	Description
IPC21215 (P) -3800K-4G-128G	21.5" TFT LCD / Resistive touch screen / No extension button / DC9~36V Input / Resolution 1920x1080 / 3855U / 4G RAM / 128G / mSATA / 2xLAN / 4xUSB / 1xHDMI
IPC22215 (P) -3800K-4G-128G	21.5" TFT LCD / Capacitive touch screen / No extension button / DC9~36V Input / Resolution 1920x1080 / 3855U / 4G RAM / 128G / mSATA / 2xLAN / 4xUSB / 1xHDMI
IPC24215 (P) -3800K-4G-128G	21.5" TFT LCD / Non-touch screen / No extension button / DC9~36V Input / Resolution 1920x1080 / 3855U / 4G RAM / 128G / mSATA / 2xLAN / 4xUSB / 1xHDMI

Optional Accessories

mSATA	128G / 256G / 512G
2.5" HDD	512G / 1T / 2T
RAM	4G / 8G / 16G

Packing List

Terminal	2 pin spring clamp terminal
Terminal	3 pin screw terminals

Note: Package contents are subject to change without prior notice