

Powerful. Beautiful.

**Excellence · Innovation**

IDD22156EX-R2



## Shanghai Panelmate Electronics Co., Ltd.

15.6" WXGA Industrial ATEX Monitor

PanelMate's ATEX products have passed  
ATEX EU explosion-proof certification



**PANELMATE**  
Creative HMI Solution



## Features

- Passed the ATEX-Ex EU protection certificate
- Display size: 12.1",15",15.6",18.5",19",21.5"
- Front panel/back cover: Aluminium-magnesium alloy
- Front panel/Rear: IP65 / IP65
- Screen Type: Multi-point capacitive touchscreen
- OS: Win7,Win8,Win10,win11, Linux
- Add IDD-LINK4 ports for video and touch signal
- DC 24V
- Must purchase IDD-LINK4-T to cooperate with the use


## Namely Rule



## Specifications

Model	IDD22156EX-R2	
Routine	Product Attribute	Built-in aluminium magnesium explosion-proof control display
	Housing	Front panel & back cover:Aluminium-magnesium alloy
	Mounting	Embedded, VESA 100 with waterproof nut
	Rear I/O	1 × M12 4pin DC power supply; 1 × M12 8pin IDD-LINK4
Power	Input Voltage	DC 24V input
	Power	28W
Physical	Dimension (WxHxD/mm)	421.9 x 281.8 x 69 (16.61" x 11.09" x 2.72")
	Open Size (WxH/mm)	403.6 x 262.3 (15.89" x 10.33")
	Net Weight(kg)	5.85kg
LED	Display type	15.6" WXGA TFT
	Resolution	1366 x 768
	Colors	16.7M
	Active Area (WxH/mm)	344.23 x 193.54 (13.55"x 7.62")
	Backlight	LED
	MTBF(Hour)	50000hrs
	Pixel Pitch (HxV)	0.252 x 0.252
	Luminance(cd/m2)	300cd/m2
	Contrast Ratio	500:1
Viewing Angle	(L)85 / (R)85 / (U)85 / (D)85	
Touchscreen	Touch Type	Multi-point capacitive touchscreen
	Light Transmission	>85%
	Controller	USB interface
	Driver Support	Windows XP, Windows 7, Windows 8, Windows 10/11, Linux, CE
	Multi-touch	10 point
	Surface Hardness	Capacitive touchscreen: Mohs' Number 7H
Environment	Operating Temperature	0 ~ 55°C
	Storage Temperature	-20 ~ 60°C
	Relative Humidity	5 ~ 95% (Non condensation)
	Shock	Operating 10G peak acceleration(11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz,1Grms@with HDD;2Grms@with SSD, follow IEC 60068-2-64
	EMC	CE/FCC Class A
	Front Panel Protection	All IP65 waterproof and dustproof
Certification		II 3 G Ex ec IIC T4 Gc
		II 3 D Ex tc IIIC T135°C Dc
		EN 60079-0:2018
		EN 60079-7:2015
		EN 60079-31:2014


## Technical Drawings unit: mm

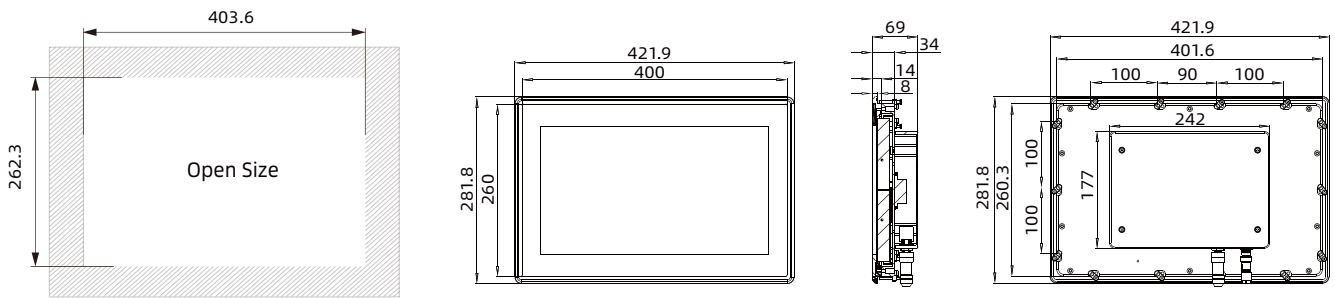

Panel Cutout Dimensions: 403.6 x 262.3mm ( 15.89 x 10.33in)

## External I/O View

1 x M12 8pin X-code IDD-LINK4  
1 x M12 4pin A-code DC power supply

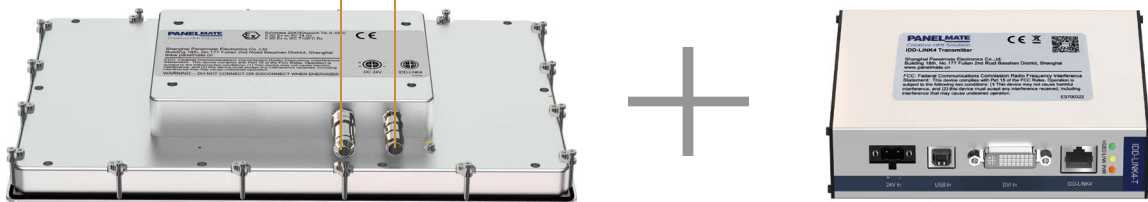

**\* Notice: This product must be used with IDD-LINK4-T(sending end)**

## Ordering Information

Part Number	Description
IDD22156EX-R2	15.6" TFT LCD / ATEX Capacitive touch screen / DC 24V Input / Resolution 1366 x 768
IDD-LINK4-T	KVM extender (transmitter box) / DC 24V

## Optional Accessories

M12 to RJ45	5m / 10m / 15m / 20m
IDD-LINK4-T	1

## Packing List

Cable	1x M12 to RJ45 (IDD-LINK4) 3m cable
Power input connector	1x M12 to 4pin power input connector

Note: Package contents are subject to change without prior notice