

Powerful. Beautiful.

**Excellence · Innovation**

IDD21215 (P)

IDD22215 (P)

IDD24215 (P)



**Shanghai Panelmate Electronics Co., Ltd.**

21.5" FHD Industrial Monitor(Vertical Screen)


# IDD21215 (P) & IDD22215 (P) & IDD24215 (P)



## Features

- Display type: 10.1",10.4",11.6",12.1",12.2",15",15.6",17",17.3",18.5",19", 21.5",24",27"
- Front panel/back cover: Aluminium-magnesium alloy
- IP: Front panel IP65 / Rear cover IP20
- Screen Type: Single point resistive touchscreen, Multi-point capacitive touchscreen, Non-touch screen
- OS:Win7, Win8, Win10, Win11, Linux, etc
- Interface: DVI, HDMI, VGA video interface, 2xUSB
- DC 12~36V
- R1(IDD-LINK),Long distance USB signal output, support 50m
- R2(IDD-LINK4),Video and USB are transmitted via a single CAT6 network cable, Transmission distance up to 100m


## Namely Rule

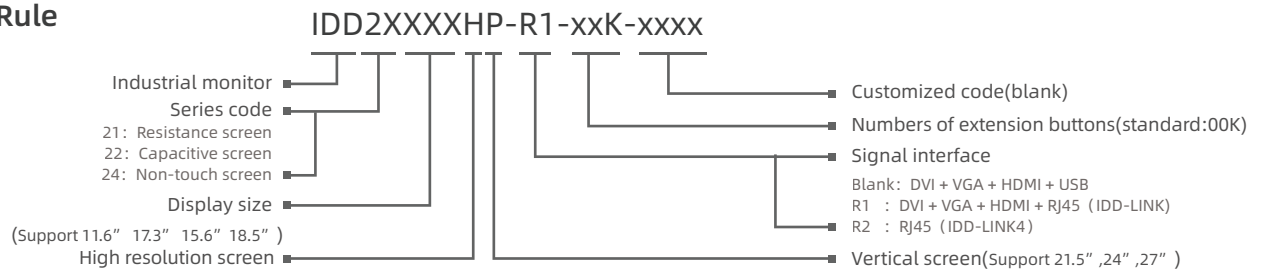

## Specifications


Model	IDD21215 (P) &IDD22215 (P) &IDD24215 (P)	
<b>Routine</b>	Control button	Set contrast ratio and luminance via OSD at the back cover
	Housing	Front panel & back cover:Aluminium-magnesium alloy,Grounding isolation protection
	Mounting	Embedded,Wall-mounted,VESA ,Desktop
	Rear I/O	VGA & DVI & HDMI & USB
<b>Power</b>	Input Voltage	DC 12~36V
	Power	20W
<b>Physical</b>	Dimension (WxHxD/mm)	530.5 x 322.5 x 58 ( 20.89" x 12.70" x 2.28" )
	Open Size (WxH/mm)	519 x 311 ( 20.43" x 12.24" )
	Net Weight(kg)	5.2
<b>LCD</b>	Display type	21.5" FHD TFT
	Resolution	1920 x 1080
	Colors	16.7M
	Active Area (WxH/mm)	476.64 x 268.11 ( 18.77" x 10.56" )
	Backlight	LED
	MTBF(Hour)	30000hrs
	Pixel Pitch (HxV)	0.24825 x 0.24825
	Luminance(cd/m2)	250
	Contrast Ratio	3000:1
	Viewing Angle	(L)89 / (R)89 / (U)89 / (D)89
<b>Touchscreen</b>	Touch Type	Single point resistive touchscreen & Multi-point capacitive touchscreen & Non-touch screen
	Light Transmission	>85%
	Controller	USB interface
	Driver Support	Windows7, Window8, Windows10, Windows11, Linux, etc
	Multi-touch	10 points
	Surface Hardness	Resistive touchscreen: Mohs' Number >= 3H;Capacitive touchscreen: Mohs' Number 7H
<b>Environment</b>	Operating Temperature	0 ~ 50°C
	Storage Temperature	-20 ~ 60°C
	Relative Humidity	5 ~ 95% (Non condensation)
	Shock	Operating 10G peak acceleration(11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms@with HDD;2Grms@with SSD, follow IEC 60068-2-64
	EMC	CE/FCC Class A
	Front Panel Protection	Front panel IP65 compliant

## Technical Drawings unit:mm

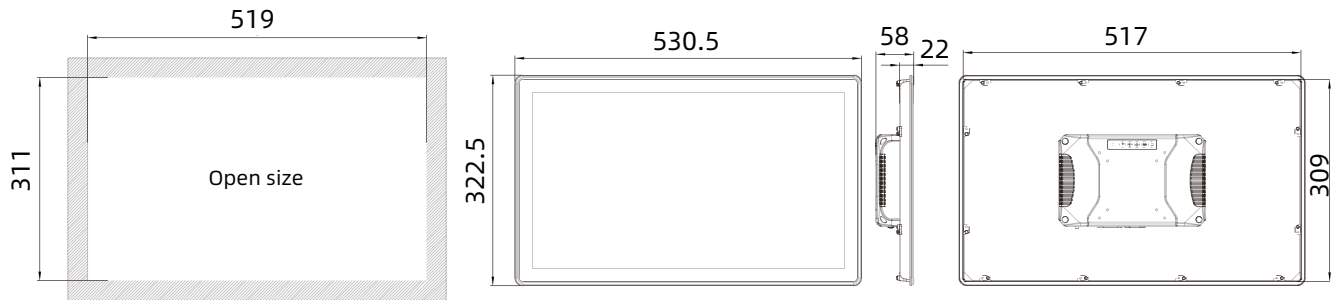

Panel Cutout Dimensions: 519 x 311mm (20.43 x 12.24in)

## External I/O View

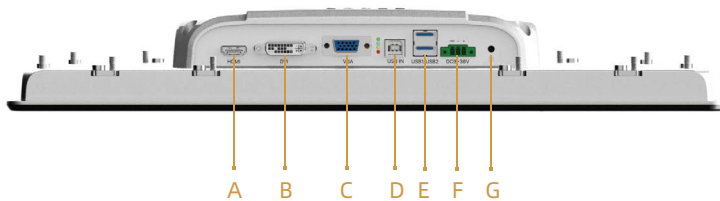

Interface definition:

- A: HDMI
- B: DVI
- C: VGA
- D: USB input
- E: USB output
- F: DC 12~36V
- G: GND

## Ordering Information

Part Number	Description
IDD21215 (P)	21.5" TFT LCD / Resistive touch screen / DC 12~36V Input / Resolution 1920x1080
IDD22215 (P)	21.5" TFT LCD / Capacitive touch screen / DC 12~36V Input / Resolution 1920x1080
IDD24215 (P)	21.5" TFT LCD / Non-touch screen / DC 12~36V Input / Resolution 1920x1080

## Optional Accessories

VGA	VGA 3m / 5m
DVI	DVI 3m / 5m / 8m / 10m
USB	USB 3m / 5m / 10m
HDMI	HDMI 3m / 5m / 10m

## Packing List

Terminal	3 pin spring clamp terminal
----------	-----------------------------

Note: Package contents are subject to change without prior notice