

Powerful. Beautiful.

**Excellence · Innovation**

PC6960-POE



**Shanghai Panelmate Electronics Co., Ltd.**


PC6960 Wall-mounted Box PC



## Features

- Compacted aluminium-magnesium alloy profile housing, seal and dust proof design
- Unilateral interface, DIN rail wall-mounted
- 6 x Intel i210 Gbe LAN support EtherCAT and jumbo frames
- 4 x USB3.0, built-in 1 x USB2.0, pluggable software dongle to prevent data loss
- DVI+DP dual interface
- 2 x COM (DB9) , BIOS serial port setting RS232 or RS485
- Real-time optimization, more suitable for motion control
- Integrated 4 x POE + 16 pin isolation DIO + 1 x MIO
- DC 12~24V

## Namely Rule

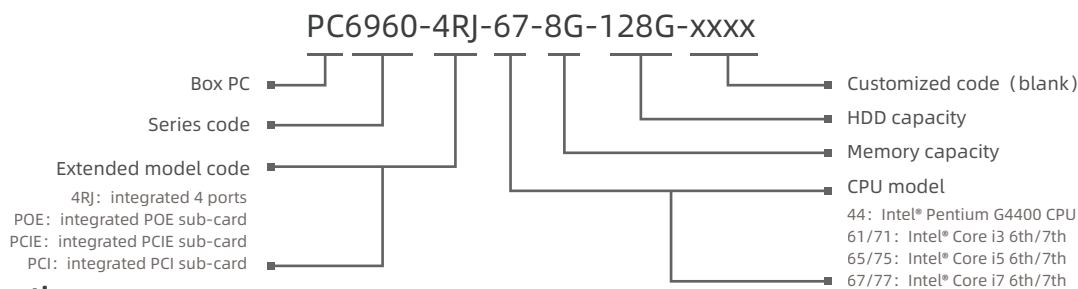


## Specifications


Model	PC6960-POE	
Processor	CPU	6th Intel® Skylake -S / 7th Intel® Kabylake -S, Intel® Pentium G4400/ Intel® Core i3 i5 i7
	Chipset	Intel® H110
	BIOS	AMI UEFI 64Mbit
I/O	Storage	1x2.5" SATA 3.0 HDD/SDD, 1x full size mSATA (SATA & USB2.0)
	Memory	DDR4-2133/2400MHz, Preinstallation 4GB, Max: 32GB
	LAN	6 x Intel i210-AT 1000Mbps RJ45 with surge protection, 4 x Intel with POE function, one port max power: 15W
	USB	4xUSB3.0, built-in 1xUSB2.0 (hardware USB softdog)
	COM	2xRS232/RS422/RS485, The interface is isolated from TVS (DB9), and the RS485 supports automatic flow control
	Expansion Slot	1xMini-PCIe (PCIe+USB) with SIM card slot, expandable 4G, LTE, BT, ETC
	Pilot Lamp	1xPower light, 1xHDD light, 3xCPU temperature light (red: alarm; yellow: hyperthermia; green: normal)
	Input Voltage	DC 12~24V, 2x2 pin terminal
	MIO	1 x MIO optional CAN
	Wachdog	0-255 programmable setting
	Control Switch	1xpower, 1xAT/ATX Optional switch, 1xClear/CMOS switch
	Display Type	
		DVI-I (DVI-D+VGA): DVI-D: resolution: 1920*1200@60Hz
		VGA: resolution: 2560*1600@60Hz
OS	OS	INtime, EC-Win, RTX-2014/2016 and Ubuntu Preempt-RT Windows 7, Windows 10, Linux Fedora Ubuntu (remark: 7th Intel® Kabylake-S CPU don't supported Windows 7 32-bit)
Physical	Dimension (WxHxD)	202mm x 152mm x 70.8mm (7.95" x 5.98" x 7.79")
	Box Structure	Compacted aluminium-magnesium alloy profile housing, seal and dust-proof design, GND protection
	Mounting	Wall-mounted, DIN-Rail mounting
	Power	65W
	Net Weight	2.5kg
Environment	Operating Temperature	-20~60°C
	Storage Temperature	-40~80°C
	Relative Humidity	5~95% (Non condensation)
	Shock	Operating 10G peak acceleration(11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms@with HDD; 2Grms@with SSD, follow IEC 60068-2-64
	EMC	CE/FCC Class A

# PC6960-POE


## Technical Drawings unit: mm

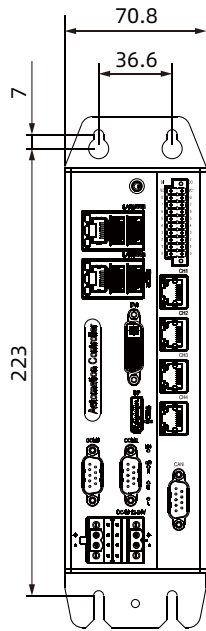

Front view

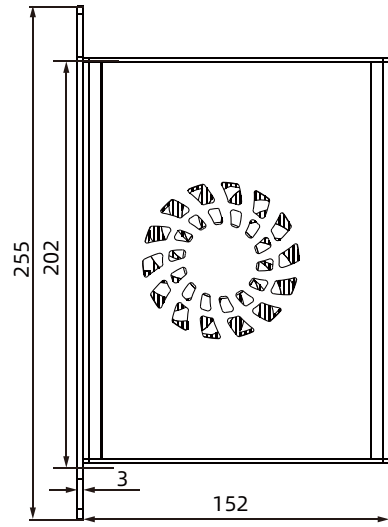


Side view

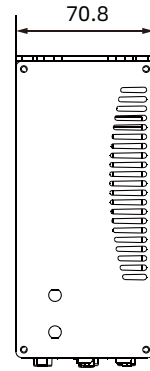


Top view


## External I/O View

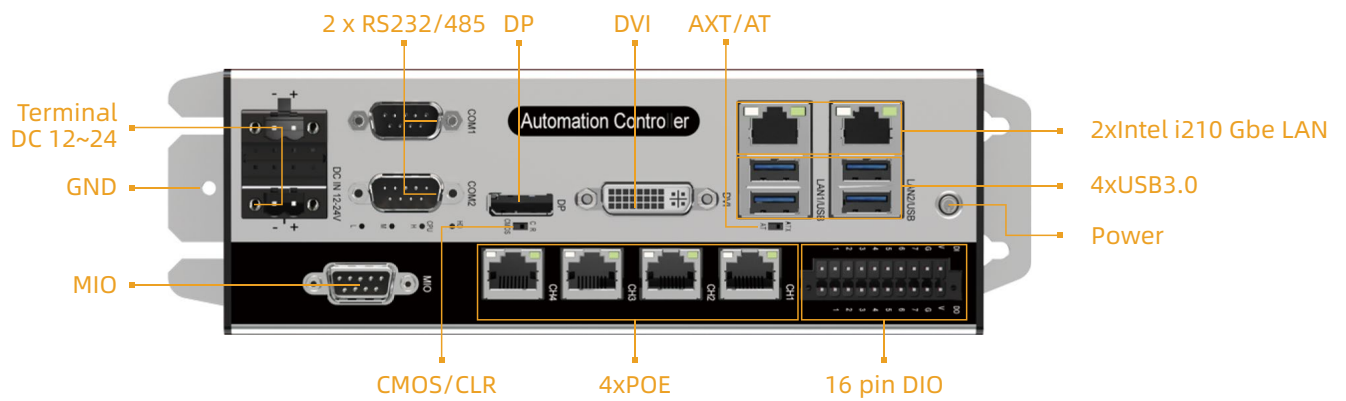

miniPCIe Expansion slot



USB2.0 Softdog



2 x Wireless antenna

## Ordering Information

Part Number	Description
PC6960-POE	CPU:Null, RAM: Null, mSATA: Null; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-44-4G-128G	CPU:Intel® Pentium dual Core™ G4400, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-61-4G-128G	CPU:Intel® Core™ 6th i3-6100, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-64-4G-128G	CPU:Intel® Core™ 6th i5-6400, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-65-4G-128G	CPU:Intel® Core™ 6th i5-6500, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-67-4G-128G	CPU:Intel® Core™ 6th i7-6700, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-71-4G-128G	CPU:Intel® Core™ 7th i3-7100, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-75-4G-128G	CPU:Intel® Core™ 7th i5-7500, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input
PC6960-POE-77-4G-128G	CPU:Intel® Core™ 7th i7-7700, RAM: 4G, mSATA: 128G; 2xCOM (RS232/485 BIOS switchable) , 6 x LAN (4xPOE) , 4 x USB3.0, DVI-I/DP interface, 1 x MIO, 16-pin isolation DIO, DC12~24V power input

## Optional Accessories

Optional Accessories	Description
CPU	Intel® Pentium G4400
	Intel® Core™ 6th i3-6100, i5-6400, i5-6500, i7-6700 i3-6100T, i5-6400T, i5-6500T, i7-6700T
	Intel® Core™ 7th i3-7100, i5-7500, i7-7700, i3-7100T, i5-7100T, i7-7700T
DDR4 memory	DDR4-2400MHz, 4GB, 8GB, 16GB, 32GB
SSD	mSATA, 64GB, 128GB, 256GB, 512GB, 1TB
WIFI sets	miniPCIe, WIFI sets, (7260HMWBN) cylindrical antenna
4G set/EC203G module	miniPCIe